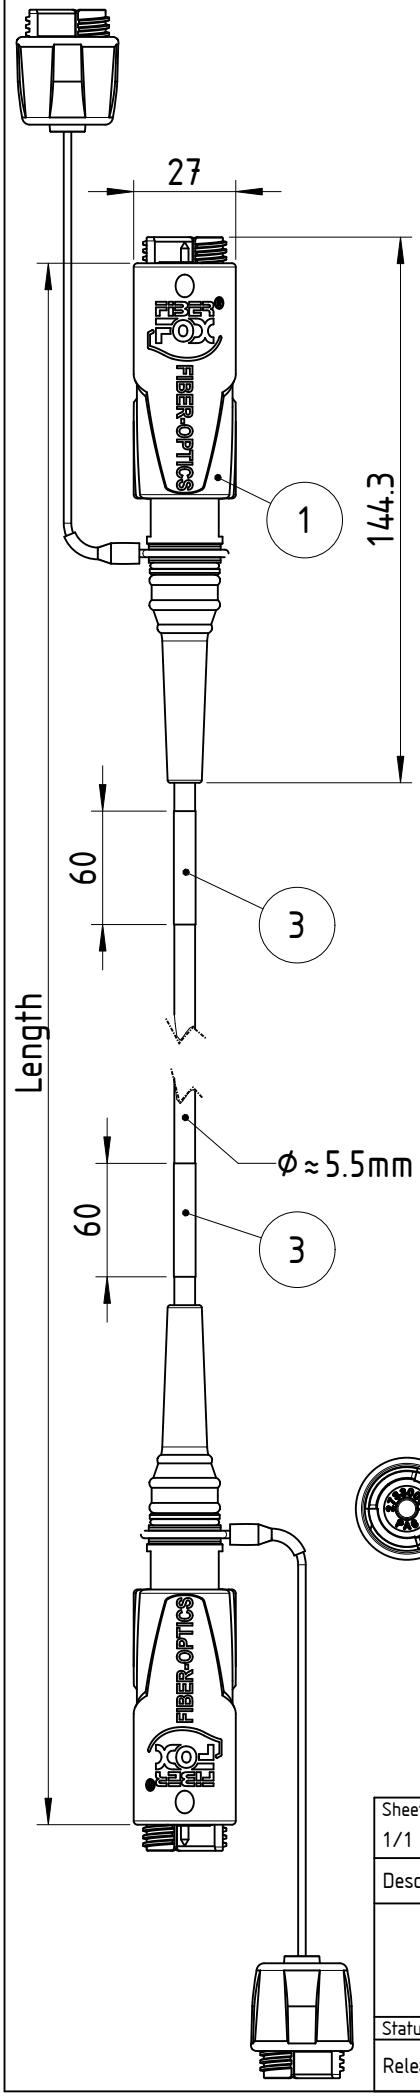

FIBERFOX EBC25 fiber optic cable terminated with expanded beam plug 4 CH

-protection class: IP68(up to 6m)
-core diameter: 50µm (multimode)
-operating temperatur: -46°C bis +71°C (-51°F to 160°F)
-mating cycles: 5000

2x transperent shrink tube loose on both sides.
unshrinked for customized self-labeling befor shrinking.

All FIBERFOX connectors meet the MIL-DTL-83526 standard. FIBERFOX cable plugs are hermaphoditic, means no distinction in male in female. Two- and four-channel systems can be mixed. (Attention: in this case only chanel A1 and B1 works)

Description	Stock-Code	Length	Weight
NK04M3-FG-0-005 airspool	1036306	5 m	0.36 kg
NK04M3-FG-0-010 airspool	1036308	10 m	0.5 kg
NK04M3-FG-0-020 airspool	1036310	20 m	0.79 kg
NK04M3-FG-0-050 airspool	1036316	50 m	1.66 kg
NK04M3-FG-0-100 airspool	1036320	100 m	3.11 kg
NK04M3-FG-0-150 airspool	1036326	150 m	4.56 kg
NK04M3-FG-2-050 cable reel	1036340	50 m	3.26 kg
NK04M3-FG-2-100 cable reel	1036346	100 m	4.71 kg
NK04M3-FG-2-150 cable reel	1036350	150 m	6.16 kg



No.	Part	Qty.
1	Expanded beam plug 4ch MM cable 6mm plug	2
2	TD-04G50-OM3-MIL	1
3	Shrink TubeØ6,4->3.2 unshrinked	2

Sheet Number 1/1	Projection	Scale 1:2	Format A4	General Tolerancing ISO 2768 mK	
Description			Created on/by		
NK04M3-FX FIBERFOX EBC25 cable 4CH MM OM3			Approved on/by		
			Article ID	Model ID	Drawing ID
				NK04M3-FX	NK04M3-FX
Status			Revision	ECN Number	Neutrik Group
Released			-	-	

Copyright © Neutrik AG / Im alten Riet 143 / 9494 Schaan / Liechtenstein